


Overview - 52-7172A - XC Dual Embedder/De-embedder

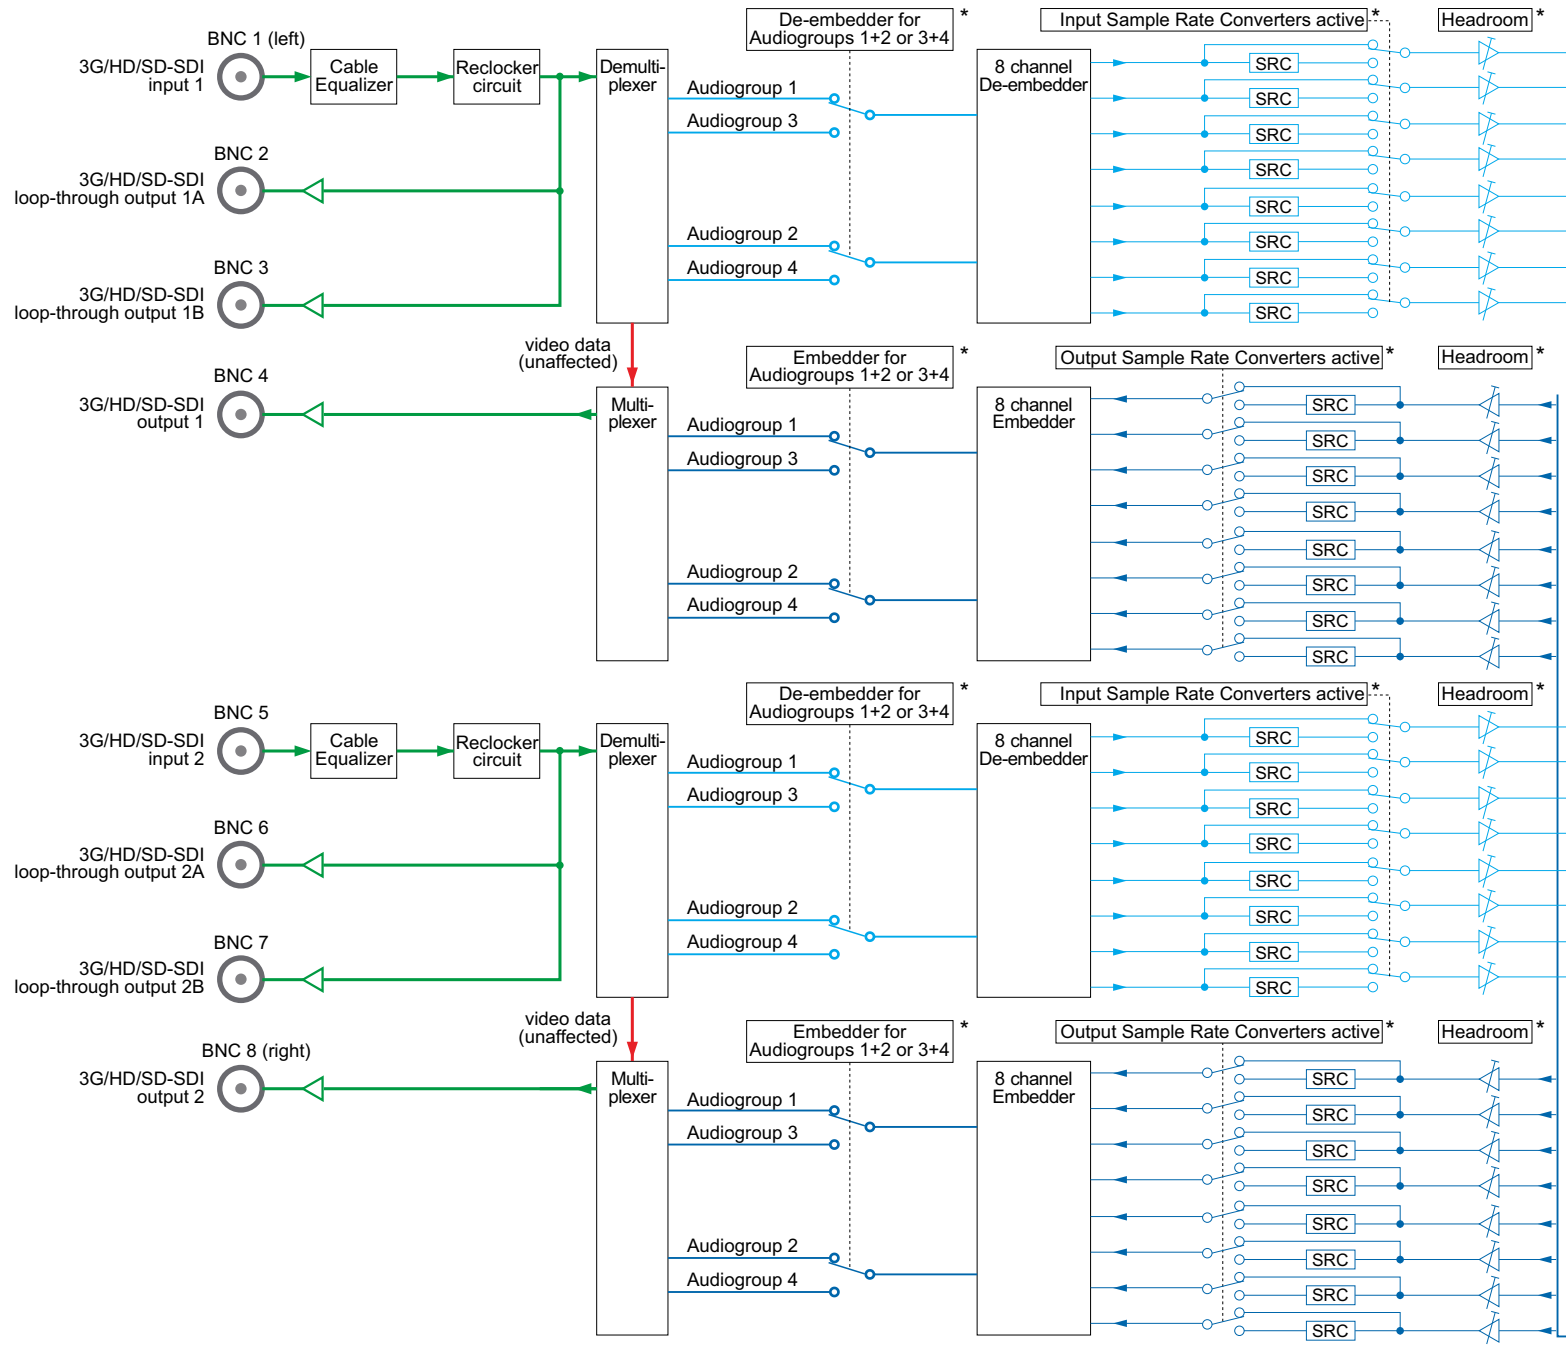

Sample Rate Converters active:
XC/XD/XS Core may operated asynchronous to the SDI Video sync.
Sample Rate Converters bypass:
XC/XD/XS Core needs to be operated synchronous to the SDI Video sync.

*) Settings are adjustable in the Toolbox5/8 "Audio and Logic I/O Configuration"

Specifications and design are subject to change without notice.
The content of this document is for information only. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does neither convey nor imply any license under patent- or other industrial or intellectual property rights.